



IF THE TOTAL WATTS OF ELECTRICAL APPLIANCES EXCEEDS THE OUTPUT CAPACITY OF INVERTER. OR AFTER OPERATING FOR A PERIOD OF TIME. IF THE TEMPERATURE OF THE INVERTER REACHES 60 , THE INVERTER SHALL BE REDUCED AC OUTPUT BY THE PROTECTION CIRCUIT.

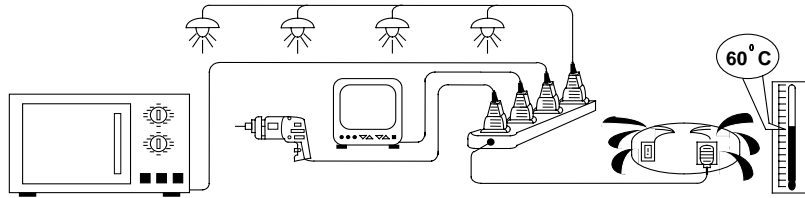

## FULL AUTOMATIC DC-AC 1000W INVERTER WITH BUILT-IN 20A or 10A BATTERY CHARGER

### CAUTION


- \* ALWAYS PLACE THE INVERTER IN AN ENVIRONMENT WHICH IS :
  - ( A ) WELL VENTILATED
  - ( B ) NOT EXPOSED TO DIRECT SUNLIGHT OR HEAT SOURCE
  - ( C ) OUT OF REACH FROM CHILDREN
  - ( D ) AWAY FROM WATER/MOISTURE, OIL OR GREASE
  - ( E ) AWAY FROM ANY FLAMMABLE SUBSTANCE



DC12V or 24V to AC220V~240V  
Instruction Manual

Please read user manual before use.

**WARNING FLUORESCENT LAMP**  
DO NOT USE THIS DEVICE WITH FLUORESCENT LAMPS.

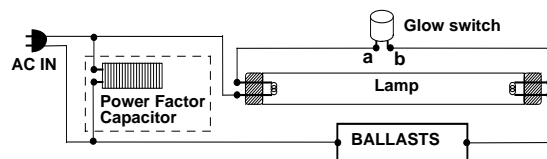

## USEFUL APPLICATIONS

RUN NOTEBOOK COMPUTERS, RADIOS, TVS, VCERS,  
LAMPS, FANS, FAX, DRILL, . . . . . ETC.

## SPECIFICATION

INPUT VOLTAGE RANGE : DC 10~15V (12V) // DC 20~30V (24V)

INPUT FULL LOAD CURRENT : 100A (12V) // 50A (24V)

STANDBY INPUT CURRENT : <0.6A (12V) // <0.4A (24V)

OUTPUT VOLTAGE (AC) : 220V~240V

OUTPUT WAVEFORM : MODIFY SINEWAVE

OUTPUT FREQUENCY : 50Hz

CONTINUE OUTPUT POWER : 1000W

PEAK OUTPUT POWER : 2400W

EFFICIENCY : 85~90%

BATTERY LOW PRE-ALARM :  $10.5 \pm 0.5V$  (12V) //  $21 \pm 0.5V$  (24V)

BATTERY LOW SHUTDOWN :  $10 \pm 0.5V$  (12V) //  $20 \pm 0.5V$  (24V)

THERMAL PROTECT :  $60 \pm 5$  (MICROCONTROLLER )

AUTO-OPERATION FAN (TEMPERATURE OR LOAD)

OVERLOAD PROTECT : YES (MICROCONTROLLER )

OUTPUT SHORT PROTECT : YES ( MICROCONTROLLER )

BATTERY EX. 12V / 24V PROTECT : YES ( MICROCONTROLLER )

BATTERY POLARITY PROTECT : YES (BY FUSE )

FUSE : 25A\*6PC (12V) // 15A\*6PC (24V)


TRANSFER TIME : 16m SEC

CONTINUE CHARGER CURRENT : 20A (12V) // 10A (24V)

DIMENTION ( L\*W\*H) mm : 395\*198\*80

WEIGHT : 3.9Kg

BATTERY LED DARK/LIGHT INDICATIVE CHART.

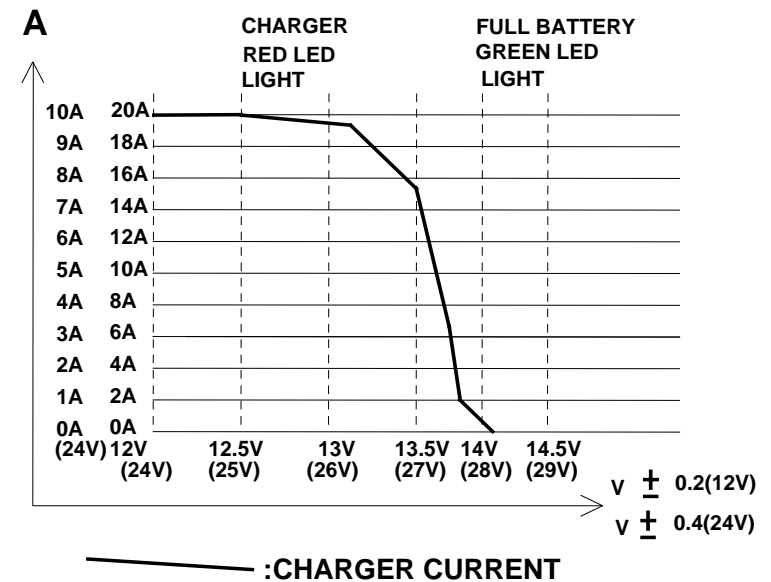

## INDICATING SIGN


NORMAL LIGHTED LED : POWER SWITCH " ON ", INVERTER STANDBY

NORMAL UNLIGHTED LED : POWER SWITCH " OFF "

CHARGER LIGHTED RED LED : BATTERY CHARGING

CHARGER LIGHTED GREEN LED : FULL BATTERY


AC IN LIGHTED LED : BY PASS (POWER FROM AC INPUT)

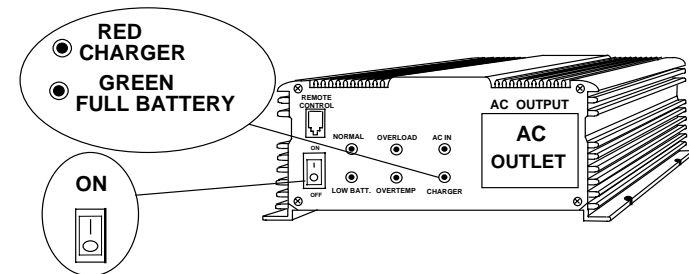




## USE INVERTER-1


**STEP1:**  
SET THE POWER SWITCH AT THE OFF

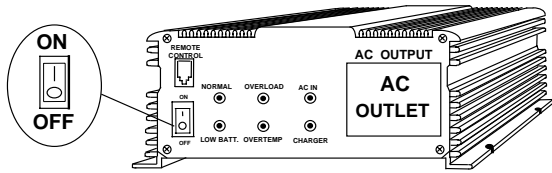

**STEP2:**  
WHEN CONNECTED TO ANY APPLIANCE, BE SURE TO TURN ON INVERTER FIRST. AND THEN, TURN ON THE POWER SWITCH OF THE APPLIANCE.

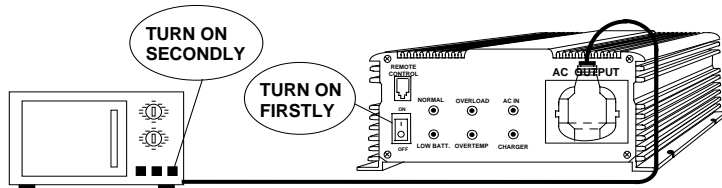


DO NOT USE THE INVERTER EXCEED ITS MAXIMUM OUTPUT POWER, WHEN CONNECTED TO ANY APPLIANCE. MAKE SURE THE TOTAL STARTING POWER CAPACITY DOES NOT EXCEED THE MAXIMUM OUTPUT POWER OF THE INVERTER.

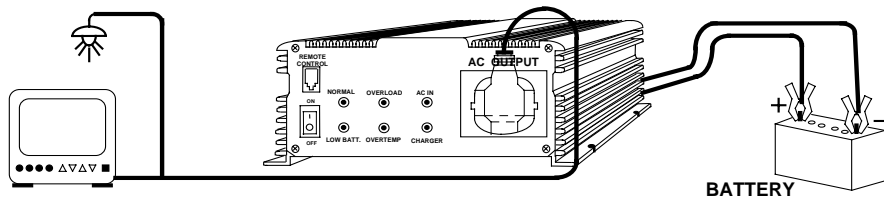

## USE INVERTER-2

**Optional accessory : Remote control**  
**REMOTE CONTROL OPERATION :**  
WHEN CONNECTED TO ANY APPLIANCE, BE SURE TO TURN ON INVERTER FIRST. AND THEN, CONNECT WITH THE REMOTE CONTROL WELL AND TURN ON THE SWITCH OF REMOTE CONTROL.

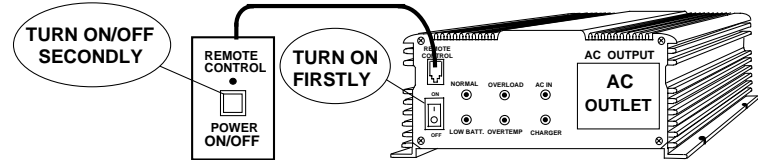

## AS UPS

IF YOU WANT TO USE THIS UNIT AS U.P.S. FUNCTION , TURN ON THE SWITCH OF THE INVERTER AT FIXED POSITION FIRSTLY. WHEN THE BLACK OUT OCCURS IN THE MEANTIME, THE INVERTER WILL DIVERT AUTOMATICALLY FROM HOME ELECTRICITY INTO THE BATTERY TO SUPPLY THE POWER FOR APPARATUS USE CONTINUALLY.

